

# QuickFit™ Strap Fitting Instructions

1" - OK1400-130-05

1.5" - OK1410-130-05

2" - OK1420-130-05


### Kit Contents:

QuickFit Strap




Adhesive Velcro Tab




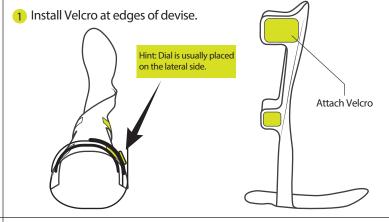


2 Check guide position.




Important: Add optional QuickFit Buckle if desired before continuing to step 3:







4 Wrap strap from dial around body to determine strap length.

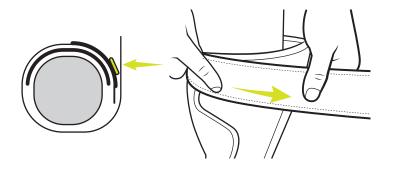


5 Cut strap to size at dial.



6 Push to engage dial: Twist clockwise to tighten.



7 Pull up on dial to release tension: Lift Velco tab to release.







## QuickFit™ Buckle Add-On Instructions

- 1" OK1405-000-05 1.5" - OK1415-000-05
  - 2" OK1425-000-05


1 Install QuickFit buckle on device with included Velcro tabs.




2 Attach QuickFit strap:



B. Loop Velcro tab through buckle.









### See QuickFit Strap for sizing instructions


3 Cut strap to size and attach to Velco end of buckle.



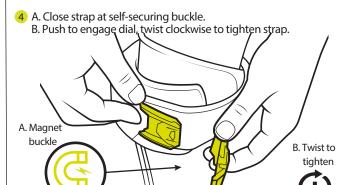

### To release strap:

1 Pull up dial for quick release.



2 Pull tab to open.

