

SIZING OPTIONS FOR HEEL WEDGE

(Shown at actual size)

INSTRUCTION SHEET

ODYSSEY®_{K3} WEDGE KIT



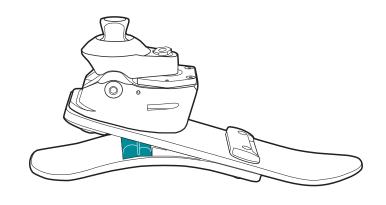











Heel wedges are not required.
Follow these guidelines if an increase in firmness is desired.

ODYSSEY KS WEDGE PLACEMENT

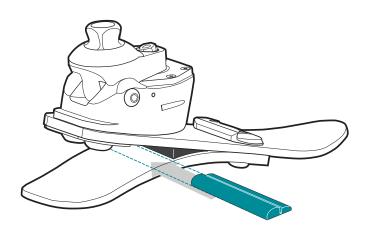

ADJUSTMENT OPTIONS FOR WEDGES

HEEL FIRMNESS	WEDGE
MEDIUM	NONE*
FIRM	Single
X-FIRM	Double



Make a Single Wedge by cutting the Double Wedge in half.

WEDGE INSTALLATION AND REMOVAL

SEMI-PERMANENT BOND (INITIAL FITTING)

- Apply only the smallest amount of CA adhesive* (included) necessary to temporarily hold the wedge into position. Too much will inhibit removal.
- 2 Install the rounded wedge directly behind the triangular wedge.
- 3 Press on the wedge and hold it for 15 seconds.

WEDGE REMOVAL


To remove the rounded wedge without damage, pry it away with a finger or use a flat, blunt object such as a tongue depressor.

PERMANENT BOND (FINAL FITTING)

- Apply a thin line of CA adhesive* around the bottom perimeter of the wedge.
- When installing the rounded wedge, place directly behind the triangular wedge.
- 3 Press on the wedge and hold it for 15 seconds.

NOTE: The wedge will NOT be removable once it has been bonded





ACAUTIONS

- Use only the correct size wedge in the foot (see back for sizing guide).
- Do not remove permanent triangular wedge.
- Place wedge only in the recommended position.
- Do not substitute other objects in place of recommended wedges.

^{*}NOTE: Medium build comes standard. There is a triangular shaped wedge permanently bonded into all feet.

^{*}Cyanoacrylate (CA) adhesive, included as part of the wedge kit.