







Lindhe Xtend
Xtend Connect

steeper
by eqwal.



Xtend Connect
by Lindhe Xtend

The Xtend Connect gives prosthetic users more flexibility by allowing them to easily switch between a prosthesis or socket. The component part can be fitted anywhere with a variety of industry standard connections. These devices use a simple wheel lock mechanism, or push rods, in combination with a safety button to give true flexibility.

The Xtend Connect can be used to connect different prosthetic components, depending on the lifestyle and usage needs of the user. Users can now wear the same prosthetic socket across multiple limbs. Dependent upon activity, users can simply swap their prosthetic foot, whilst keeping the same socket on.

Suitable for both transtibial and transfemoral applications, the system is ideal for quickly disconnecting the prosthetic foot to make dressing easier, or allowing the same limb to be worn with feet set to varied heel heights - without the need to change footwear.



Features and Benefits:

- Quickly exchange feet whilst keeping the same socket, and maintaining optimal alignment of prosthesis
- Change sockets whilst keeping limb builds intact
- Greater flexibility when dressing - such as removing feet to pull on trousers
- Less baggage – users can pack their activity specific prosthesis without having to pack the entire limb build
- Connect Prime Quickfit Unit accommodates for weights up to 150kg*
- Connect Shape is an option to use with traditional cosmetic covering.
- Designed to be used with industry standard 30mm systems
- The Quick Fit Unit is waterproof in fresh water, sea water and chlorinated water with appropriate care**. Note that the Connect Shape is not waterproof.
- Safety button ensures secure connection from the first step

* For Connect Shape and activities reaching K4 levels, patient weight is limited at 100kg
** Rinse immediately with fresh water and dry following exposure to salt water or chlorinated water.



Xtend Connect Components

The Xtend Connect can be rotated in any direction and freely combined with compatible prosthetic components. It is fitted in-line and can be fitted above or below the prosthetic knee, with a variety of connection options to choose from. The Connect Prime is available in two wheel colour options: Black or Orange.

An Xtend Connect Prime set consists of two components:

Connect Prime Quick Fit Unit
The Quick-Fit Connect unit features an easy-to-use locking wheel and safety button for connecting and disconnecting.

Connect Prime Base Unit
The Base Units easily fit into the Quick-Fit Connect and are available as a Pyramid or Pyramid Receiver.

Closed and locked position



Open and released position



Xtend Connect Shape
Designed to integrate seamlessly as part of a cosmetic cover, it can be removed easily with a single-handed grip, or, if required, with a two-handed push. Available as a double female pyramid adapter.



1. Quick fit unit
2. Base unit
3. Safety button
4. Locking wheel



Open and released position

Tips for assembling Xtend Connect Prime



Changing feet

Place the Xtend Connect Prime as high up as possible on the connecting tube, to allow for prosthetic feet of varying heights.



Changing trousers

The lower the Xtend Connect Prime is on the prosthetic limb, the easier it is for the user to pull on tight trousers.



Changing the knee joint

To ensure correct alignment every time, use the female pyramid as a connecting component to the knee joint.

Xtend Connect Technical Information

Product Specification


Product	Material	Activity Level*	Warranty	Waterproof
Connect Prime	Stainless Steel	K3-K4*	1 Year	Yes
Connect Shape	Aluminium	K1-K2	1 Year	No

*For Connect Shape and activities reaching K4 levels, patient weight is limited at 100kg.

Xtend Connect Component Ordering Information

	Part Number	Description	Wheel Colour	Weight Limit*
Connect Prime Components				
1	NA100-Q30-150-O	Quick Fit Unit, Tube Clamp 30 mm	Orange	150kg
	NA100-Q30-150	Quick Fit Unit, Tube Clamp 30 mm	Black	150kg
2	NA100-Q4-150-O	Quick Fit Unit, 4-Hole Adapter	Orange	150kg
	NA100-Q4-150	Quick Fit Unit, 4-Hole Adapter	Black	150kg
3	NA100-QF-150-O	Quick Fit Unit, Female Pyramid Adapter	Orange	150kg
	NA100-QF-150	Quick Fit Unit, Female Pyramid Adapter	Black	150kg
4	NA100-QP-150-O	Quick Fit Unit, M36 Threaded Device	Orange	150kg
	NA100-QP-150	Quick Fit Unit, M36 Threaded Device	Black	150kg
5	NA100-BF-150	Base Unit with Female Pyramid Receiver	-	150kg
6	NA100-BM-150	Base Unit with Male Pyramid Adapter	-	150kg
7	NA100-B30-150	Base Unit with 30mm Tube	-	150kg
Xtend Connect Shape				
8	NA200-SQF	Xtend Connect Shape Quick Fit Unit With Female Pyramid Adapter	Black	100kg
9	NA200-SBF	Xtend Connect Shape Base Unit With Female Pyramid Adapter	Black	100kg
10	NA200-SK	Xtend Connect Shape Quick Fit & Base Unit, Both With Female Pyramid Adapter	Black	100kg

Connect Prime Quick Fit Units

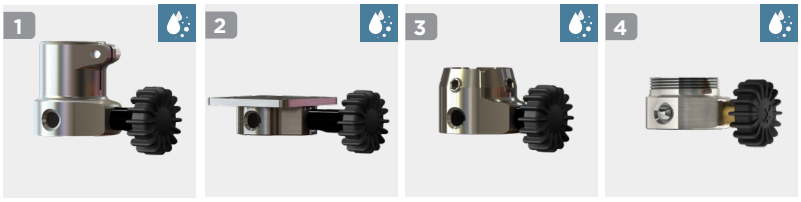

Connect Prime Base Units



Connect Shape Units



INTERACTIVE

Lindhe Xtend Connect Configurator

Use the Xtend Connect component selection tool to ensure the most effective combination is selected.

SCAN TO TRY



For more information, please contact our friendly Customer Services team via customerservices@steepergroup.com or 0870 240 4133. Alternatively, your local Product Manager is on hand to provide clinical support.

Steeper Group, Unit 3 Stourton Link, Intermezzo Drive Leeds, LS10 1DF

Tel: +44 (0) 870 240 4133 Email: customerservices@steepergroup.com www.steepergroup.com

STPPR097 Issue 2 Novemeber 2026